


# CAMBO

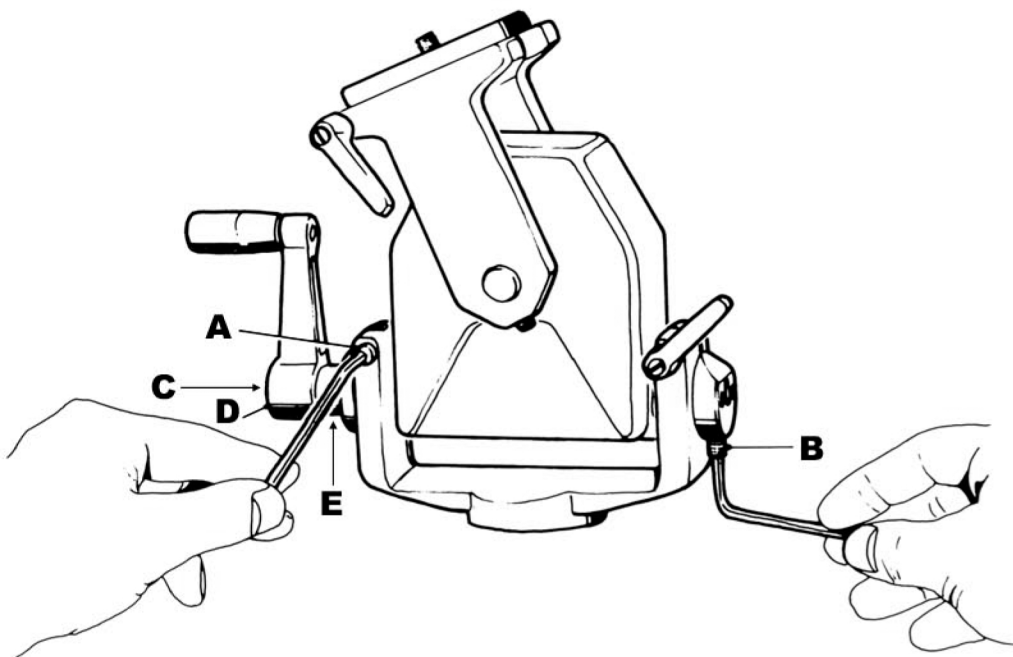

You have just purchased a CAMBO SCH Geared Head.  
This head has been thoroughly tested and inspected.

For the safety of your camera, always take care to mount the camera on to the top of the head only while the head is in horizontal position.

Should you find that the Swing and/or Tilt movement is either too tight or too loose, you may adjust it by turning the adjustment screw A and/or B until the proper tension is reached.

CAMBO Fotografische Industrie B.V.

Sie haben soeben ein CAMBO SCH Stativkopf gekauft.  
Dieser Stativkopf ist gründlich getestet und geprüft.

Für die Sicherheit Ihrer Kamera sollten Sie immer die Kamera auf das Plateau montieren weil es horizontal plaziert ist.

Wann die Schwenk- und/oder die Neig-Bewegung zu straff oder zu geschmeidig verläuft, kann das angepasst werden durch die Schrauben A und/oder B ab zu stellen bis die richtige Spannung erreicht ist.

Vous venez d'acquérir une rotule professionnelle CAMBO SCH. La rotule a été enherement testée et contrôlée.

Pour la sécurité de votre appareil, montez le lorsque quand la table est en position horizontale.

Si vous trouvez que le pivotement avant-arrière et/ou le basculement latéral sont trop durs ou trop lâches, vous pouvez obtenir la tension souhaitée en tournant les visses d'ajustement A et/ou B.

U heeft zojuist een Cambo SCH statiefkop aangeschaft.  
Deze is grondig getest en geïnspecteerd.

Voor de veiligheid van uw camera dient u altijd deze op het plateau te monteren terwijl dit hoerizontaal geplaatst is.

In het geval dat de Swing en/of Tilt beweging te strak of te soepel verloopt, kan dit aangepast worden door schroef A en/of B te verdraaien totdat de gewenste spanning is verkregen.

# SCH / SCH-U

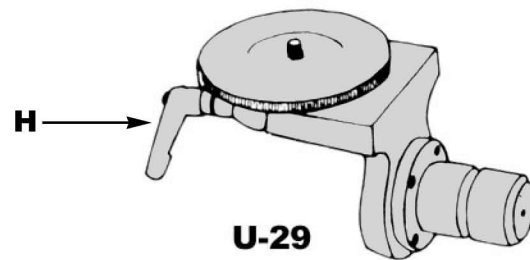
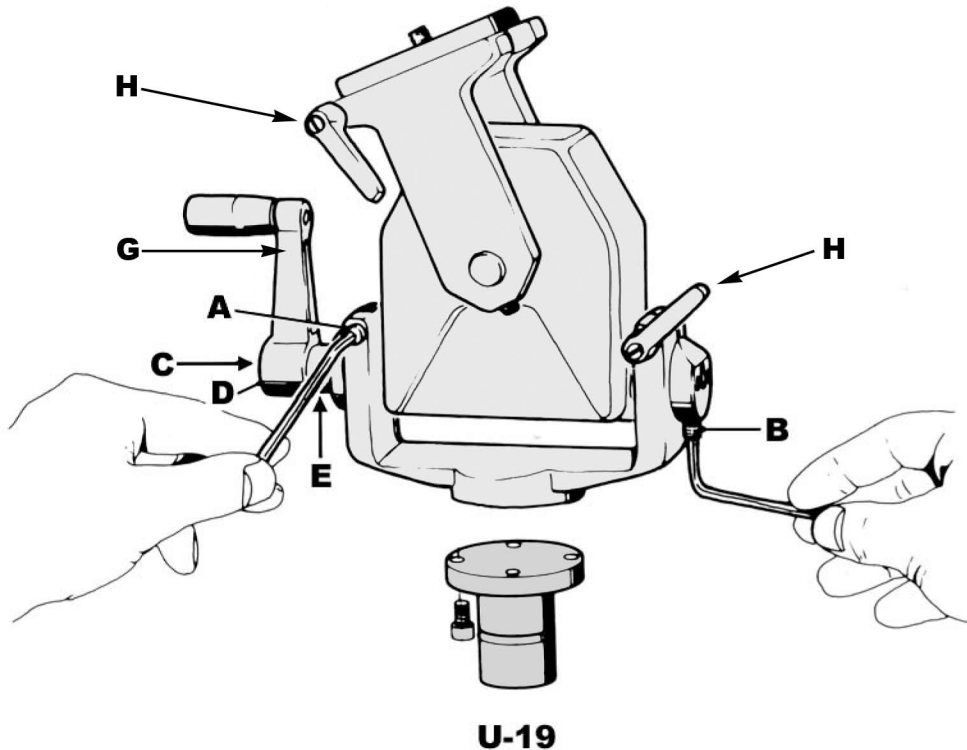


fig.20

## CAMBO SCH 3-D Gear Head

There are two possibilities to use the gear head on your UST or UBS.

1. In combination with the U-19 coupling-unit directly into the cross arm. This offers a side-tilt of 180° and also the lowest possible camera position on the cross arm. If you want to use the gear head including this U-19, you order the complete set as SCH-U. If you already got the gear head, you can order the U-19 separately.
2. In combination with the U-29 camera platform. This platform includes a pan-rotating table. For a yaw-free operation of the gearhead/camera combination, the pan-rotation of the camera should be executed by means of the U-29 table instead of the gear head table on the top of the SCH. The side-tilt of the gear head when mounted on the U-29 is 90°.

For the safety of your camera, always mount the camera on the table while the table is in horizontal position.

### ADJUSTMENTS:

- Should you find the Tilt and/or Side-Tilt movement too tight or too loose, you may adjust it by turning the adjustment screw A and/or B until the desired tension is obtained.  
Screw A = Side-Tilt, screw B = Tilt.
- To adjust any tilt-play, remove coverplate C, unscrew the hexagonal screw E just a little bit and tighten screw D inside the handle. Tighten screw E and replace coverplate C.

### Replacement parts:

- the small handle H is available through your Cambo reseller as Cambo part.nr. 30302042
- the larger crank G is available through your Cambo reseller as Cambo part.nr. 31190114