

CAMBO UNI TRACK

The latest addition to Cambo's expanding range of Video Support Products is this flexible, stable easy to use and modular UNI TRACK System.

Quick to set up on location, easy to level and available in several length modules, it allows the videographer to lay out and shape the track according to the desired routing. From exact straights to swings or curves with a radius of 1.5 meter (5'), it fits all in the system.



A complete system can be set up including the following components:

VPSF-600 Pedestal
with a fixed height
of 60 cm (2 ft)

or a **VPS-962**
Low Position Ball
Adapter

VPD-15 Track Dolly
designed for the
Uni Track System

UTF-Case
dedicated Flight Case
designed for the
Uni Track System



UTS-5
Foldable UNI TRACK
with a working length
of 5 meter (16 ft)

OR

UTS-10
Foldable UNI TRACK
with a working length
of 10 meter (33 ft)

OR

UTS-15
Foldable UNI TRACK
with a working length
of 15 meter (50 ft)

Main specifications:


Track Width:	62 cm
Track Weight:	6.4 kg/m
Packed Dimensions:	57x84x12 cm (5 mtr Track)

CAMBO

UNI TRACK



Cambo's UTS-5 Uni Track laid out in a very short circle. Here shown with the optional VPD-15 and the optional low position adapter VPS-962.

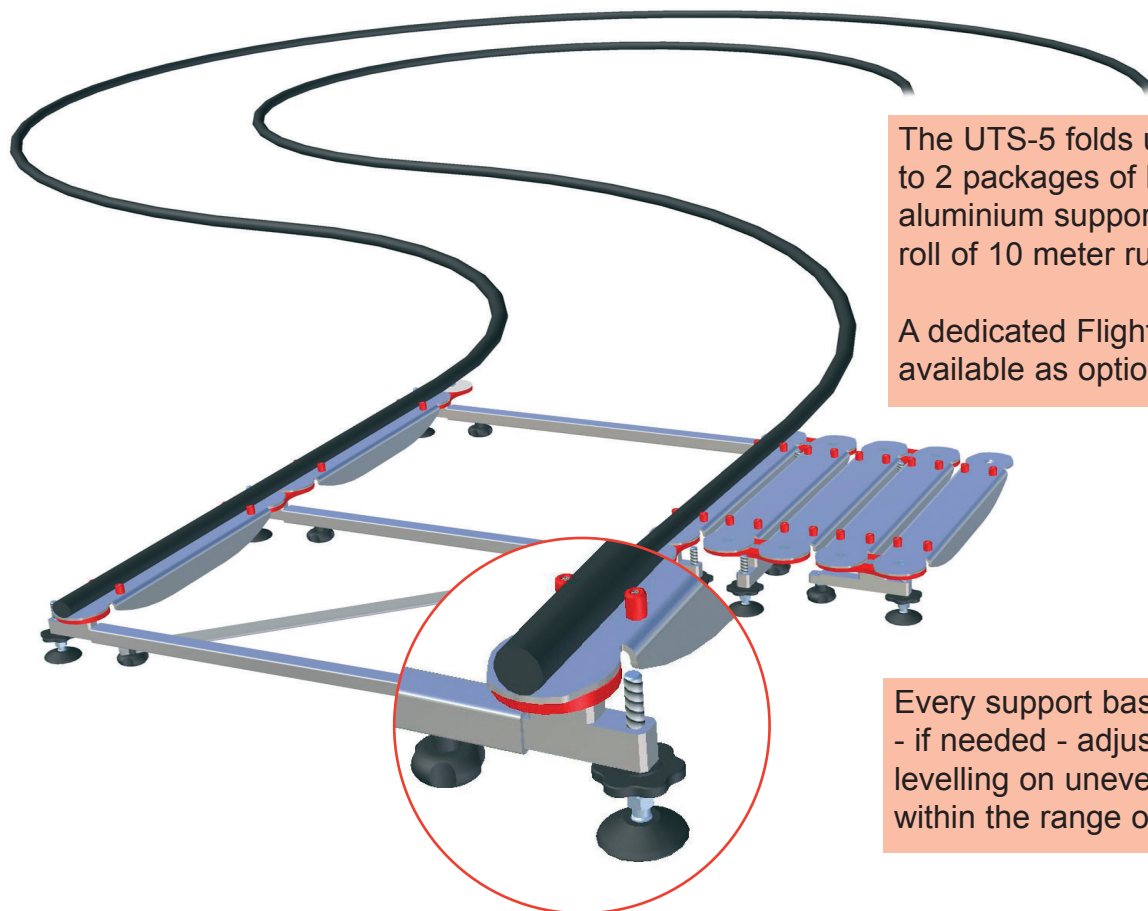

The UTS-5 folds up easily in to 2 packages of lightweight aluminium supports and one roll of 10 meter rubber track.

A dedicated Flight Case is available as optional.

Every support base can be - if needed - adjusted for levelling on uneven ground within the range of 5 cm (2")

CAMBO Video & Broadcast Products B.V.

P.O.Box 200 NL-8260 AE KAMPEN
Haatlanderdijk 45 NL-8263 AP KAMPEN
The Netherlands

Phone: +31 38 3314644
Fax: +31 38 3315110

Email: info@cambo.com
Web: www.cambo.com

All models and specifications are subject to change without notice