

CAMBO



Video Pedestals

Camera Pedestals and dollies have a lot going for them. Whether your work requires stable support for a system that's hardly manoeuvred around or a platform enabling smooth camera movements, Cambo offer the right pedestal system. We've been building column stands for photographic applications since 1946. This comprehensive range of video pedestals expands on a long legacy.

Our pedestals are modular systems which are equally suitable for outside broadcasting as for studio shooting. Cambo column stands have earned a reputation for longevity; many are passed on from one generation to the next. With our pedestals we adhere to the same high quality standards, striving to offer you the best user experience.

Manufactured with pride in The Netherlands.



Cambo VPS-1 Pedestal

The Cambo VPS-1 is a steady though lightweight video pedestal. The adjustable air pressure ensures accurate camera support and easy elevation, regardless of the weight of the equipment.

Dolly and spider set are easy to remove without the need for tools. The dolly features double, individually lockable wheels. To avoid flat spots the brake is applied internally, not pressing onto the wheel itself. The adapter on top of the steering wheel accepts both 75 and 100mm bowls.



Video Pedestals

Cambo VPS-2 Pedestal

The Cambo VPS-2 is a mid-size pneumatic pedestal offering fluid on-shot movement. Its reversible top plate accepts both 100 and 75mm bowls. The large dolly wheels are individually lockable in six positions to enable linear and radius tracking. It comes with cable movers.

Adjusting the air pressure inside the column guarantees perfect balance, regardless of the equipment's weight. Adjustable drag makes a fluid on-shot height adjustment even easier.

The VPS-2 is a travel-friendly solution. Dolly and pedestal can be separated – no tools required – when taking it to an on-location assignment.



Cambo VPS-3 Pedestal

The VPS-3 is Cambo's pneumatic pedestal meeting the highest requirements. It can be charged up to 55kg and will still offer fluid on-shot movement. Indispensable when it doesn't only need to support a broadcast camera but also additional gear like i.e. a Teleprompter.

Despite its generous payload, the VPS-3 is as travel-friendly as the lighter VPS-2. It's gross weight is only slightly higher. The VPS-3 uses the same dolly as VPS-2, featuring double, individually lockable wheels and cable movers. For more compact and easy packing, dolly and pedestal can be separated in an instant. No tools required.

VPS-3 comes with the industry standard Mitchell base. 100 and 150mm bowls are available.



Video Pedestals

Cambo VPS-4 Pedestal



The Cambo VPS-4 heavy duty geared pedestal is designed to support large cranes. Height is adjusted by crank, operating a self-locking spindle construction. It can safely support loads up to 200kg (440lbs). Height ranges from 1.28 cm up to 1.82 cm (placed at a dolly).

VPS-4 comes with a 100mm bowl. Alternatively a Mitchel base and 150 bowl are available.

The VPS-4 pedestal is usually supplied as part of the VPDH dolly kit. This comprises a platform, wheels, floor fixation kit, spider legs and push bar. VPDH is also available with track wheels.

VPDH Kit with V-40 Crane

Cambo VPS-5 Pedestal

The Cambo VPS-5 geared pedestal offers easy elevation and stable support for your equipment. It's available with either a floor mount or dolly. The top of the column has a V-Groove adapter for which various platforms are available, like standard 3/8", 75/100mm bowls and a quick release.



VPS-5




VPS-4

Video Pedestals

Cambo VPS System - Specifications at a glance

Cambo Fotografische Industrie b.v.
Haatlanderijk 45 / PO Box 200
8263 AP Kampen, The Netherlands
+31 38 3314644

	VPS-1	VPS-2	VPS-3	VPS-4	VPS-5
Minimum Height	89cm	83cm	80cm	128cm	85cm
Maximum Height	124cm	128cm	125cm	182cm	126cm
Stroke	35cm	45cm	45cm	54cm	41cm
Extensions	150 and 300mm	300mm	300mm	n/a	300mm
Payload	30kg	30kg	55kg	200kg	30kg
Weight	12kg	18kg	23kg	42kg	15kg
Color	Black	Black	Black	Black	Black
Height adjustment	Pneumatic Support	Pneumatic Support	Pneumatic Support	Geared	Geared
Pump	Included	Included	Included	n/a	n/a
Adjustable drag	X	✓	✓	n/a	n/a
Steering wheel	29,5cm diameter	34cm diameter	49cm diameter	n/a	Optional
Base	75 and 100mm bowl	75 and 100mm bowl	Mitchell*	100mm bowl ¹	Various ²
Dolly	VPD-1	VPD-2	VPD-2	VPD-4	VPD-1
Tracking width	94,5cm	95,5cm	95,5cm	75cm	94,5cm
Transit width	68,5cm	71,5cm	79cm	75cm	68,5cm
Track Dolly	Optional	Optional	Optional	Optional	Optional
Track width	62cm	62cm	62cm	62cm	62cm
Cable guards	Optional	✓	✓	n/a	Optional
Wheel diameter	125	125	125	200	125
Individual wheel locks	✓	✓	✓	✓	✓
Directional wheel lock	X	✓	✓	X	X

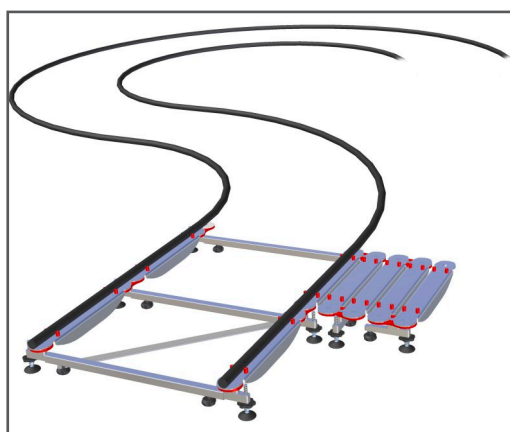

Cambo Unitrack

*100/150mm bowls optional

¹150mm bowl and Mitchell base available

²75/100mm bowls , QR and 3/8" adapters available

CAMBO

For more information and accessories visit
www.cambo.com

Models and specifications in this brochure
are subject to change without notice.