


Warnings and safety notes:

- Perspex is a material that can bend, but it can also break.
- The maximum load in the center is less than at the edges
- The maximum load is also depending on size of the object, in other words, the larger the footprint spreads over the table, the more load may be allowed.
- When changing the angle of the backdrop, make sure that you release the two knobs H of the plate holder bar, in order to allow the plate to shift up or down without breaking due to tension.

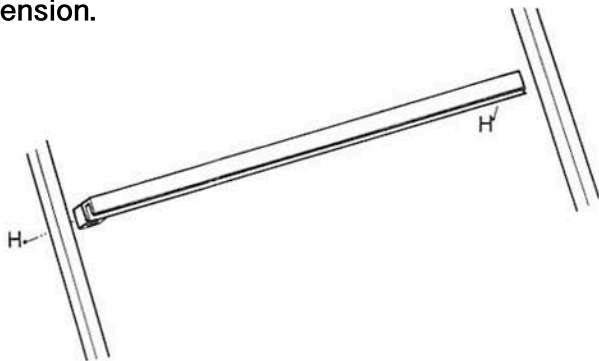

- The ideal angle of the backdrop is 45 degrees, any steeper angle should be set with great care and at your own risk. Make sure that the plate can have a smooth curve and only tighten the knobs H of the plate holder bar after setting the backdrop angle.

CAMBO ST-1

MOUNTING INSTRUCTIONS FOR CAMBO SHOOTING TABLE ST-1

Follow instructions as shown in figures - I - II - III - IV

If perspex plate is included, slide it between all clamps with H
Read the warnings and safety notes before tightening all knobs indicated with H !!!

Recommended perspex quality:	One side matted, Thickness 3 mm, Size 121 x 245 cm.
------------------------------	---


After installing Perspex plate carefully read instructions for use of the table, see left side.

VERSION 2017


All specifications in this manual are subject to change without prior notice.

	PART NAME	SIZE	QTY.
A	BOLT	m8 x 30	4
B	BOLT	m8 x 50	6
C	KNOB	m8	4
D	HANDLE	m10	2
E	NUT	m10	2
F	WASHER	m8	10
G	WASHER	m10	2
H	KNOB	m5	14
I	ADJUSTERS	m10	2
J	ALLEN-KEY	sw6	1
K	STICKER		2
L	CASTOR		2
M	KNURLED WASHER	m10	4
N	ALLEN-KEY	sw8	1
O	BOLT	m10 x 30	2


TABLE OF CONTENTS

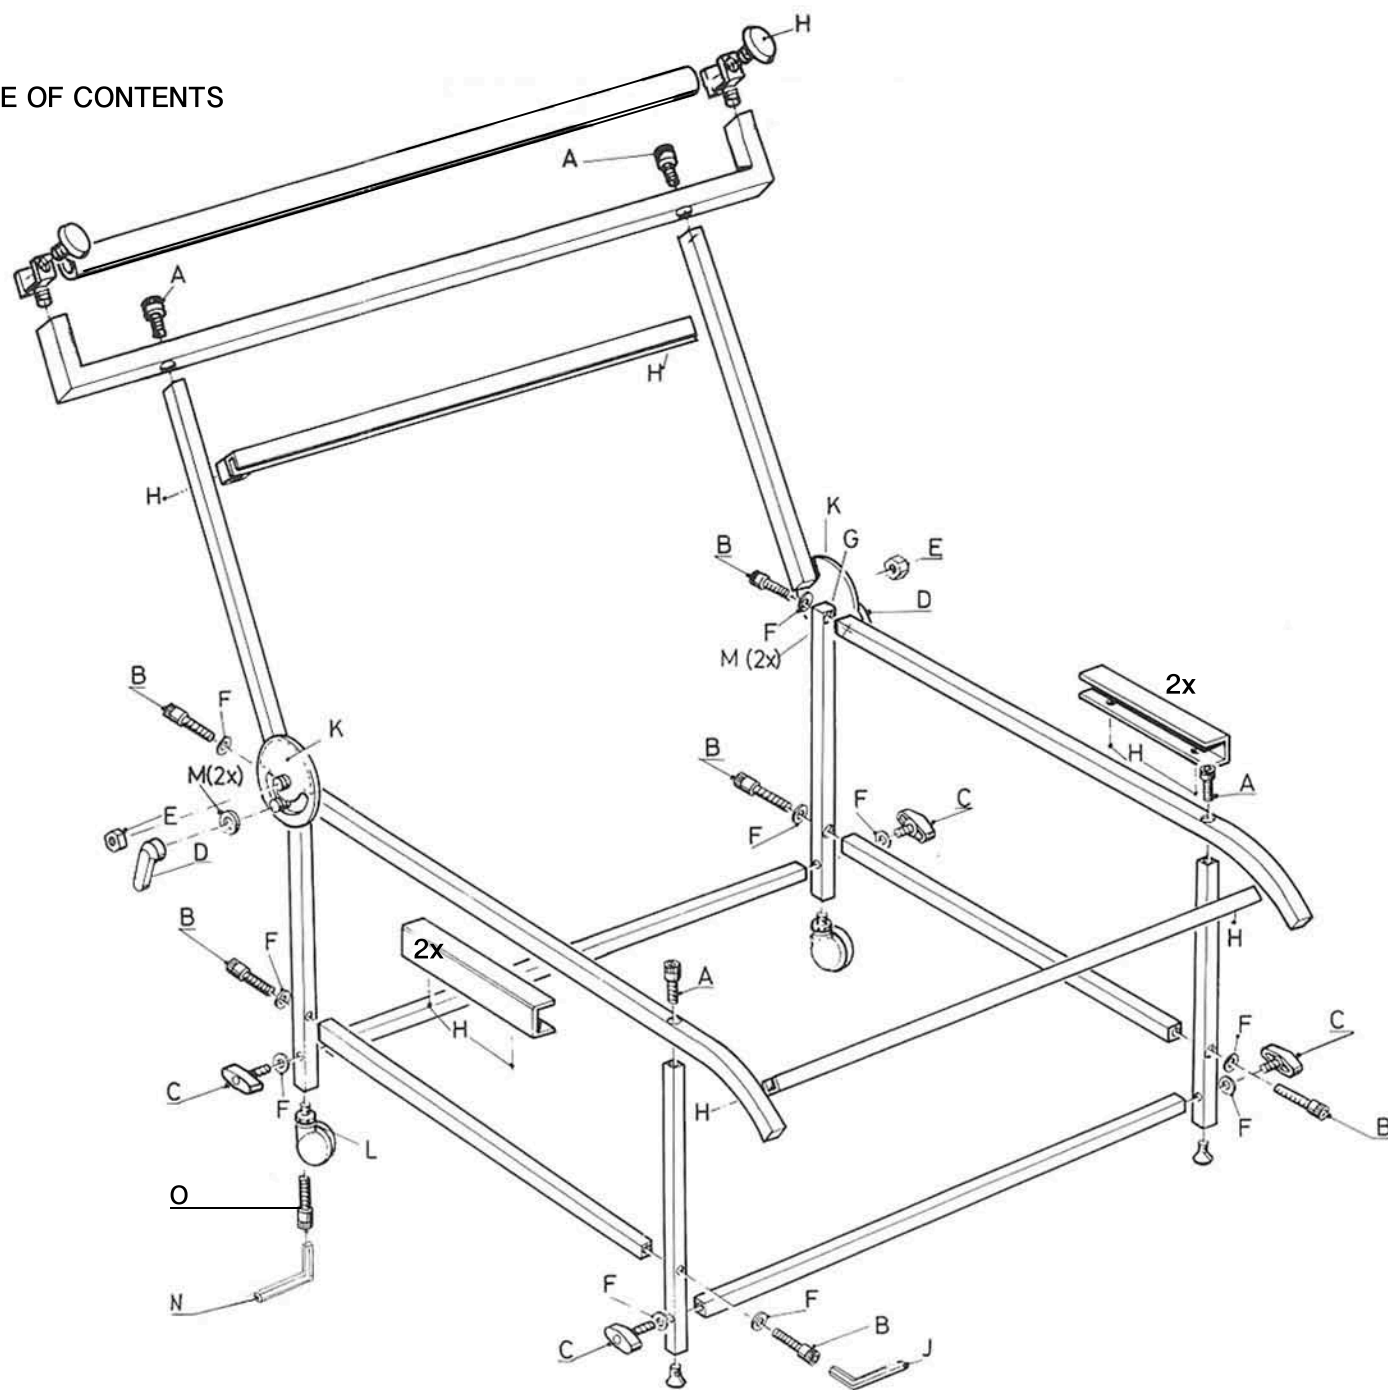


MOUNTING I

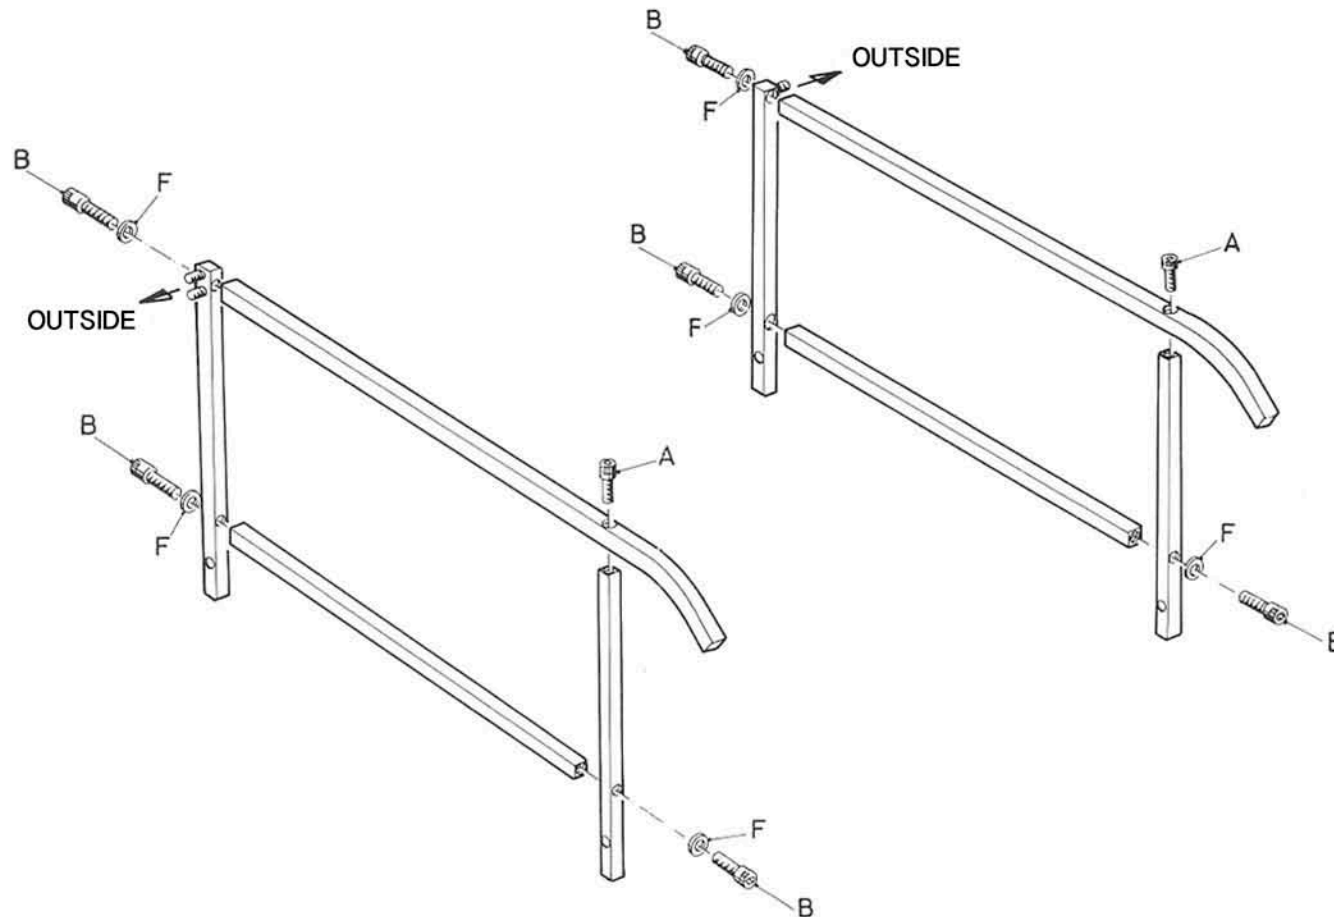

MOUNTING II

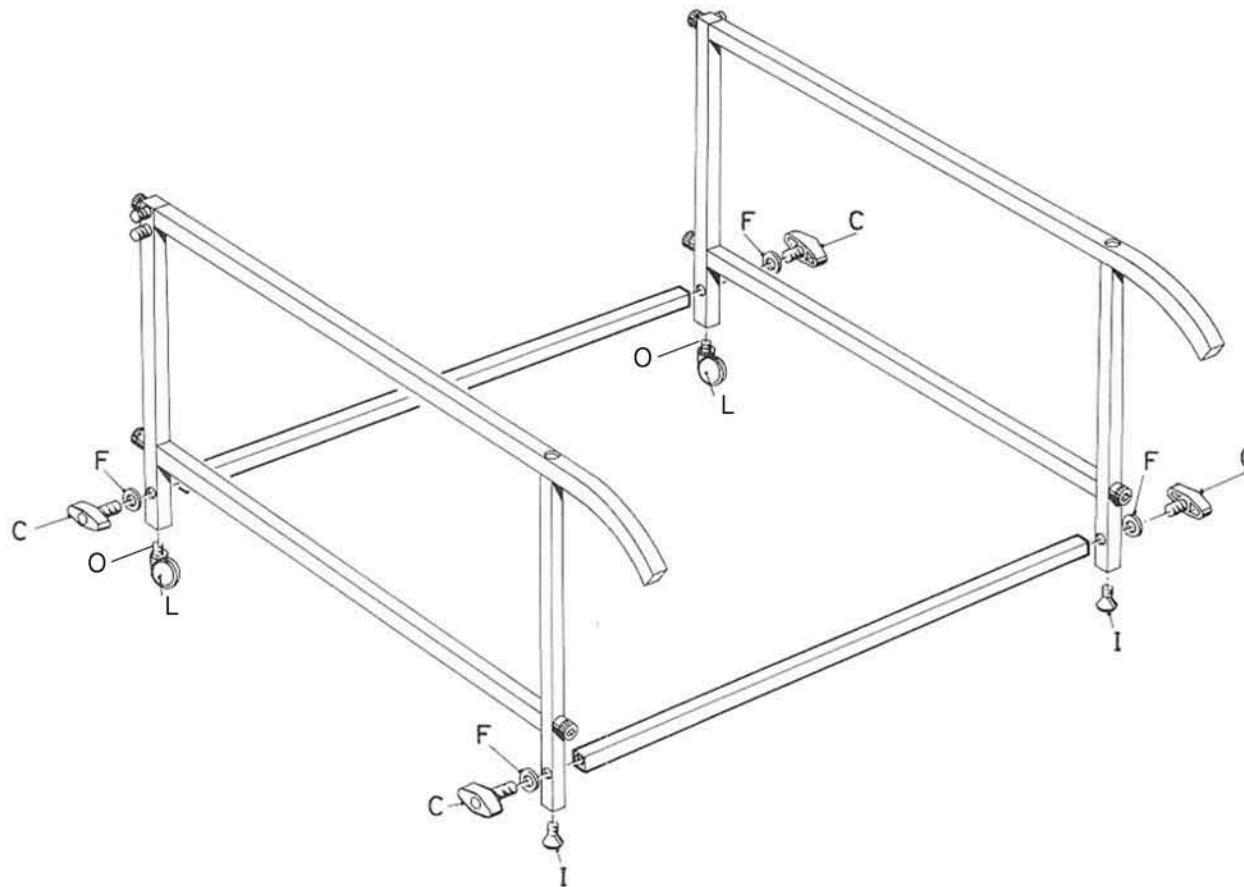

MOUNTING III

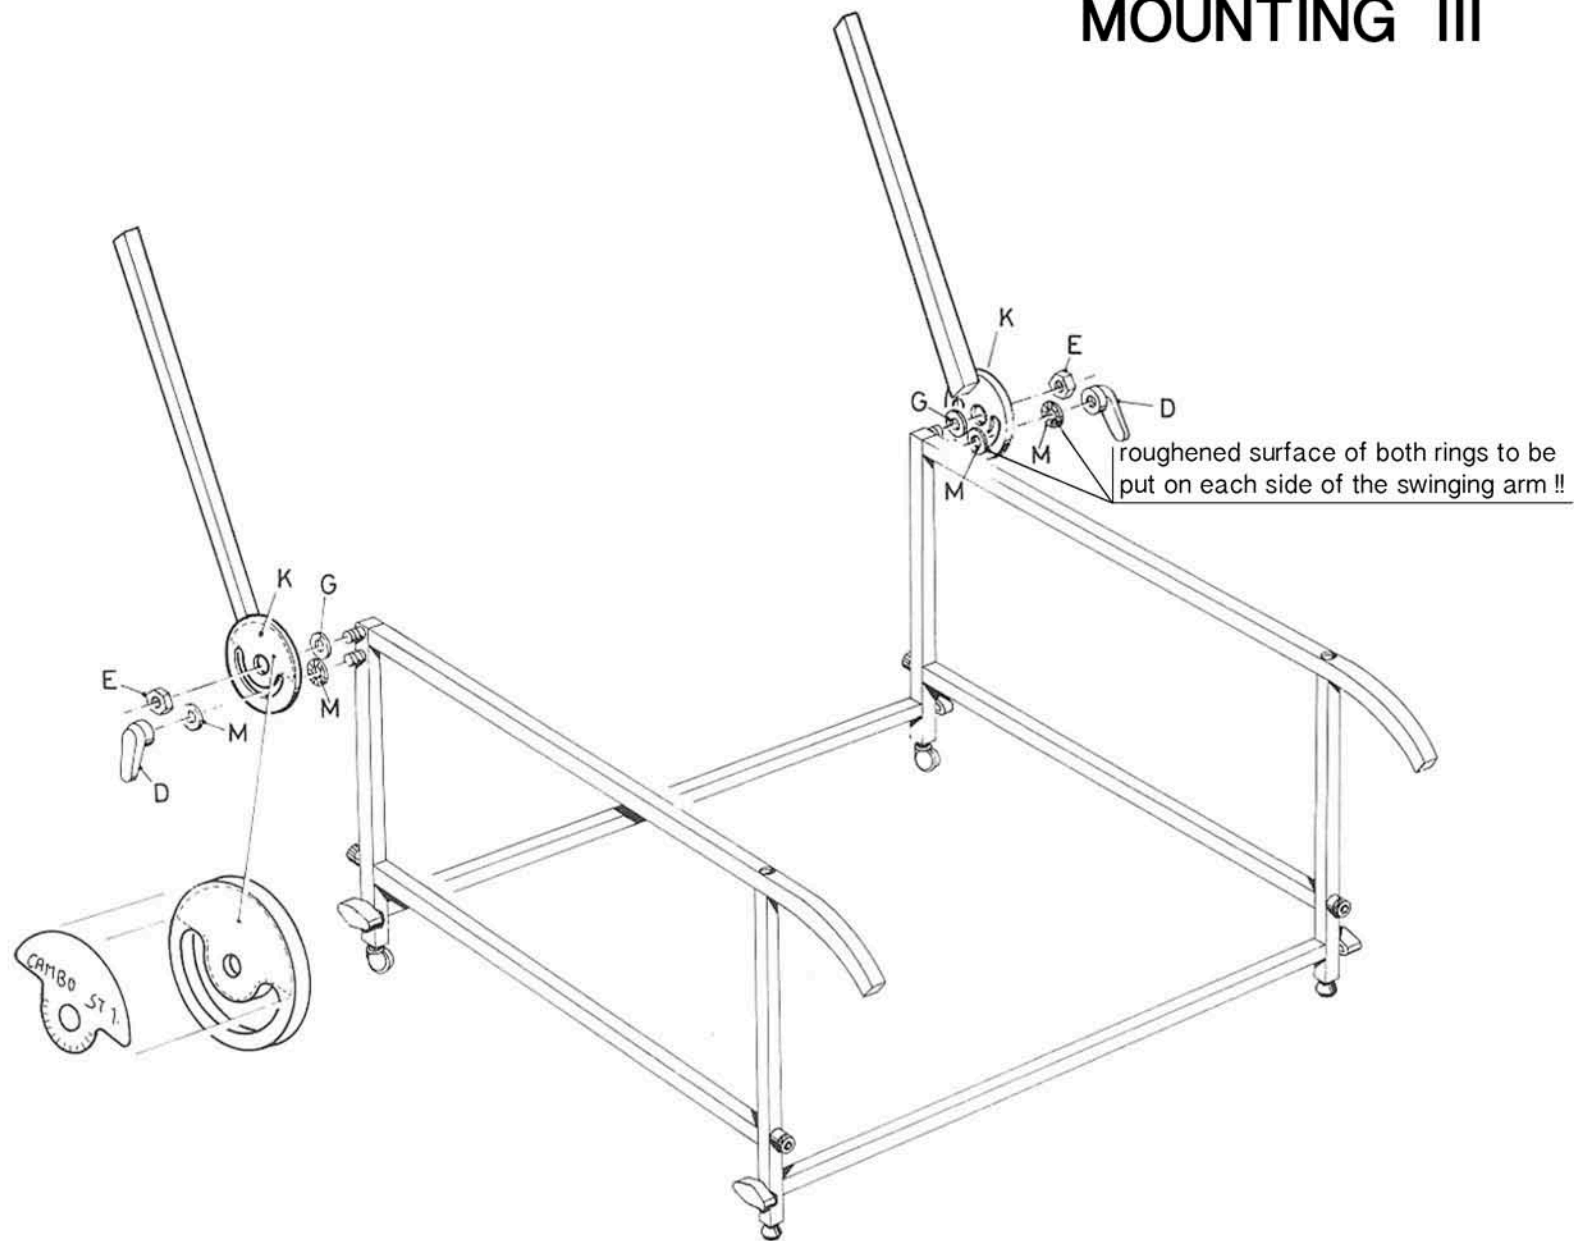

MOUNTING IV

* read our Warnings and Notes section before tightening the knobs of this support bar

Place these 4 holders as much as possible to the front

Place these 4 holders as much as possible to the front

